WAT- 07U2D 1/2.8" High Sensitivity USB2.0 Full HD Wearable B&W Camera

Added B&W version to the USB camera series


NEW



Key features

- Min. illumination 0.004 lx F2.0 (AGC ON=36dB, Shutter=OFF) 0.001 lx F2.0 (AGC ON=36dB, Shutter=1/7.5 sec.)
- Full HD (Max. frame rate 30fps)
- Enable the live video transmission via the smartphone or tablet by its Wi-Fi or 4G/3G
- Water resistant built for outdoor use (IPX7 compliance)

Dimensions

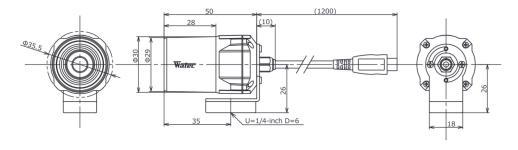

Specifications

Pick-up element		1/2.8 inch CMOS image sensor
Number of effective pixels		1945(H) × 1097(V)
Unit o	cell size	2.9µm(H) × 2.9µm(V)
Imagin	g system	-
Synchronizing system		Internal
Scanning system		Progressive
Output size		1920x1080, 1280x720, 640x480, 320x240
Max. frame rate		30 fps
Video compression		MJPG, YUY2
Video output		USB Video Class (Compatible)
Resolution (H)		More than 800TVL (Center)
		0.004 lx F2.0 (AGC ON=36dB, Shutter=OFF)
Minimum illumination		0.001 lx F2.0 (AGC ON=36dB, Shutter=1/7.5 sec.)
S/N		- 0.001 IX 12.0 (AGC 014-300B), SHURRER = 1/7.3 Sec./
Function settings		Camera Viewer
Turicuoi	r securigs	1/15, 1/7.5, 1/4 sec.
AE mode	Fixed	1/30, 1/60, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000 sec.
	EI	1/30 - 1/8000 sec.
\A/k:+-	balance	1/7.5 - 1/8000 sec.
wnite	ON	0. 2640
AGC		0 - 36dB
	OFF	_
MGC		0 - 72dB (1dB step)
Gamma characteristics		γ≒USER (Level adjustable)
Noise reduction		<u>-</u>
Wide dynamic range		_
Lens iris		_
Back light compensation		BLC
White blem	ish correction	-
Shar	rpness	Level adjustable
Defog		-
Digital zoom		×1, ×1.38, ×2.25 *1
Privacy mask		-
Mirror image		-
Freeze		-
Motion detection		_
Neg.image		-
Interface		USB (High speed)
Power supply		USB +5V
Power consumption		0.65W (130mA)
Operating temperature		-10 - +50℃
Storage temperature		-30 - +70℃
Operating / Storage humidity		95% RH or less (Without condensation)
Standard lens		M3620BC-12 (f3.6 F2.0)
		1.2m (Max.3.0m)
Cable length Weight		Approx. 85g
	-	мүргих, ору
	ssories	Tatal® Cara TM : C:
Recommended	CPU	Intel® Core TM i Series
Recommended System Specifications	RAM Others	2GB or larger USB2.0 Port, 1920×1080 or better resolution display

^{*1:} Output format: 640x480 *2: Output format: 1280x720