

# WAT-1200CS 1/3.2" High Sensitivity Miniature Camera with Day/Night


Day/Night camera for general surveillance



## Key features

- High sensitivity min. illumination 0.002 lx F1.2 (AGC ON=54dB, Shutter=OFF)
  - Ultra-compact design only 26 x 26 x 30 mm
  - Wide dynamic range, ICR Mechaless Day/Night function
  - A dual-band pass filter allows the ability to view a scene with 850nm IR illumination at night
- \*Advanced setting available by OSD (On Screen Display) through an optional remote control

## Dimensions

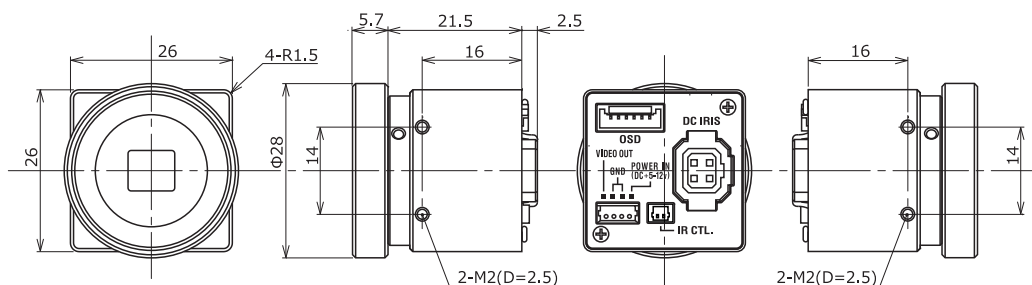

## Specifications

		NTSC	PAL
Video standard		NTSC	PAL
Pick-up element		1/3.2 inch BSI CMOS image sensor	
Number of effective pixels		1280(H) × 960(V)	1280(H) × 924(V)
Unit cell size		3.5μm(H) × 3.5μm(V)	
Imaging system		RGB+W array mosaic filters on chip	
Synchronizing system		Internal	
Scanning system		Progressive	
Video output		Composite: 1.0 V(p-p) 75Ω (Unbalanced)	
Resolution (H)		More than 750TVL (Center)	
Minimum illumination		0.002 lx F1.2 (AGC ON=54dB, Shutter=OFF)	
S/N		More than 55dB (AGC OFF=0dB, γ=1.0)	
Function settings		OSD : Remote controller	
AE mode	Fixed	1/60 sec.	1/50 sec.
	EI	1/100, 1/120, 1/125, 1/250, 1/500, 1/100, 1/2000, 1/4000, 1/8000, 1/10000, 1/20000, 1/50000, 1/100000 sec.	1/60 - 1/100000 sec.
White balance		ATW, AWB, PWB, MWB, PRESET (5100K, 6300K)	
AGC	ON	0 - 54dB	
	OFF	0dB	
MGC		0 - 54dB (6dB step)	
Day/Night		ICR mechaless Auto, Manual	
Gamma characteristics		γ≈0.45	
Video level		Adjustable	
Noise reduction		2DNR OFF/ON Level adjustable	
Wide dynamic range		WDR OFF/ON Level adjustable, D-WDR OFF/ON Level adjustable	
Lens iris		DC	
Back light compensation		BLC, HSBLC	
White blemish correction		-	
Sharpness		Level adjustable	
Defog		OFF/ON Level adjustable	
Digital zoom		-	
Privacy mask		16 masks	
Mirror image		OFF, V-FLIP, H-FLIP, HV-FLIP	
Freeze		-	
Motion detection		-	
Neg.image		-	
Interface		4P onnector (Composite Video, Power in), Auto iris, 2P connector (IR light ctrl), Remote control (RC-01)	
Power supply		DC+5V - 12V	
Power consumption		0.6W/120mA (DC+5V), 0.72W/60mA (DC+12V)	
Operating temperature		-10 - +50°C	
Storage temperature		-30 - +70°C	
Operating / Storage humidity		95% RH or less (Without condensation)	
Lens mount		CS mount	
Weight		Approx. 22g	
Accessories		AIC-G (Iris Plug), 4P cable, 2P cable, Hex. Wrench, B005 (Camera bracket)	

Accessories
  Options

**WAT-1200CS**

**CS-mount lenses**


M13VG288IR      M13VG850IR  
 AG3Z2812FCS-MPWIR    AG4Z1214FCS-MPIR

**C-mount lenses**  
\*Not in our lineup

**C-mount adaptor**  
30CMA-R

**Stand**  
MS50

**Camera bracket**  
B005



**Remote control**

RC-01

**2P cable (300mm)**

**4P cable (300mm)**

VIDEO OUT  
POWER IN (DC+5-12V)

**Cable with connectors**

CB-01

**Power supply adaptors**

SWI12-12-N-P5  
 SWI12-12-E-P5

**Cable**

VIDEO OUT (BNC)  
VIDEO OUT (BNC)  
VIDEO OUT (RCA)

**Monitor**  
\*Not in our lineup