WAT- 05U2M 1/2.8" USB2.0 Full HD Wearable Camera

Compact water resistant camera (Dimensions: H30×W30×D22mm)




Key features

- Adopted the 180 degree wide angle lens
- The position of the cable is selectable in 4 dimensions (top, bottom, left and right) depends on the application and installation

(Std. position: bottom) *The other sides are available on request

- Enable the live video transmission via the smartphone or tablet by its Wi-Fi or 4G/3G
- Water resistant built for outdoor use (IPX7 compliance)

Dimensions

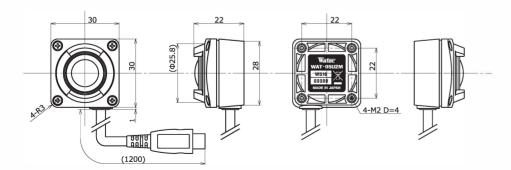

Specifications

Dick-up	element	1/2.8 inch BSI CMOS image sensor	
Pick-up element Number of effective pixels		1/2.6 ilicii 651 CPIOS ilitage seristi 1945(H) × 1097(V)	
	cell size	2.9μm(H) × 2.9μm(V)	
		RGB primary color bayer arrangement mosaic filters on chip	
Imaging system		Internal	
Synchronizing system Scanning system		Progressive	
		1920×1080, 1280×720, 640×480, 320×240	
Output size			
Max. frame rate		30 fps	
Video compression		MJPG, YUY2	
Video output		USB Video Class (Compatible)	
Minimum illumination		0.3 lx F2.0 (AGC ON=36dB, Shutter=OFF)	
C/N		0.07 lx F2.0 (AGC ON=36dB, Shutter=1/7.5 sec.)	
S/N			
Function	on settings	Camera Viewer	
	Fixed	1/15, 1/7.5, 1/4 sec.	
AE mode -		1/30, 1/60, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000 sec.	
	EI	1/30 - 1/8000 sec.	
		1/7.5 - 1/8000 sec.	
White balance		ATW, MWB	
AGC	ON	0 - 36dB	
	OFF	-	
MGC		0 - 72dB (1dB step)	
Gamma characteristics		γ≒USER (Level adjustable)	
Noise reduction		-	
Wide dyn	amic range	-	
Ler	ns iris	-	
Back light compensation		BLC	
White blem	ish correction	-	
Sharpness		Level adjustable	
Defog		=	
Digital zoom		×1, ×1.38, ×2.25 *1	
Privacy mask		_	
Mirror image		-	
Freeze		-	
Motion detection		-	
Neg.image		-	
Interface		USB (High speed)	
Power supply		USB +5V	
Power consumption		0.85W (170mA)	
Operating temperature		-10 - +50℃	
Storage temperature		-30 - +60℃	
Operating / Storage humidity		95% RH or less (Without condensation)	
Standard lens		M1720BC-12 (f1.7 F2.0)	
Cable length		1.2m	
Weight		Approx. 45g	
	ssories	другол. тоу	
Min. System Requirements	CPU	Onni a fartar	
		800MHz or faster	
	RAM	512MB or larger	
	Others	USB2.0 Port	
lecommended	CPU	Intel® Core TM i Series	
System Specifications	RAM	2GB or larger	
	Others	USB2.0 Port, 1920×1080 or better resolution display	
Operation Confirmed OS		Windows 7 32bit/64bit, Windows 8 32bit/64bit, Windows 8.1 32bit/64bit,	
		Windows 10 32bit/64bit, Android 4.0 or newer	

^{*1:} Output format: 640x480 *2: Output format: 1280x720

WAT-05U2M

